



enlarged image of the BWF linearPRISM structure



BWF linearPRISM

- For lighting applications up to UGR 16
- Optimum lighting for workstations
- Excellent glare reduction and light distribution
- Ideal in combination with clear, prismatic or satinated profiles
- Unique transmission
- High transparency
- perfect look due to linear structure in longitudinal or cross direction
- Individually tinted designs for batches > 500 m² possible
- Can be combined with all prismatic sheets
- Increased efficiency of existing luminaires

C-0 level

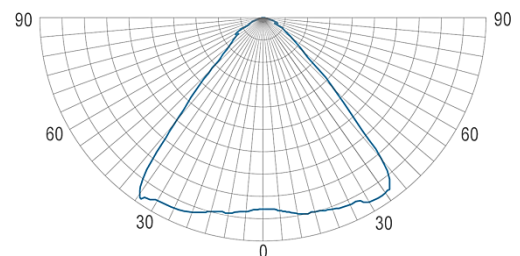

Technical Data

Material:	PMMA clear and individual colours on request.
Transmission:	94,2 per cent (PMMA clear)
Measurements	
Wall thickness:	2 mm +/- 0,15mm
Width:	1525 mm +/-5mm
Length:	max. 2200 mm

Applications

- Illumination for workstations
 - Large-scale ceiling lighting constructions
 - Combined use with other profiles in one lamp cover
- Overall glare reduction with only one sheet

Samples

Please do not hesitate to ask for a sample of **BWF linearPRISM** free of charge.

Zertifiziert nach ISO 9001:2008



BWF Kunststoffe GmbH & Co. KG
 Bahnhofstraße 20
 89362 Offingen
 Germany
 Telephone +49-8224-71-0
 Telefax +49-8224-71-2145
 info@bwf-profiles.de
 www.bwf-profiles.com